

# ThermalBuck™

## The High-Performance Window Buck

Window installation with exterior insulation is a challenge

*Solve the problem with ThermalBuck*




### The Continuous Insulation Solution

- Extends the mounting points of windows & doors
- High-density EPS insulating core (R-value of 4.4 per inch)
- Acts as an air & water barrier, coating is waterproof
- Simplifies flashing, installed with high-quality sealant
- Limits thermal bridging in the building envelope
- Prevents condensation
- Supports the weight of the window
- Allows structural attachment of the window
- Withstands shear & wind loads
- Compressive strength 52 psi
- Dimensionally stable & elastic - won't shrink or warp
- Lightweight, strong & durable - fast installation with nail gun
- Easy to replicate - window after window

*"Once you see it, you really understand the problem it solves for builders like me."*

— Matt Risinger, Risinger & Co., Austin, TX

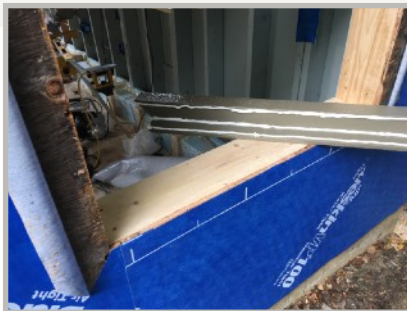

[thermalbuck.com](http://thermalbuck.com)

NOTE: Allow an additional 1/2" additional room on all 4 sides of the rough opening than recommended by window manufacturer.

**DAP** **DYNAFLEX**  
**800**  
FOR PROPER  
INSTALLATION

**THERMAL BUCK™**  
HIGH-PERFORMANCE ROESE